JH-DW5B



























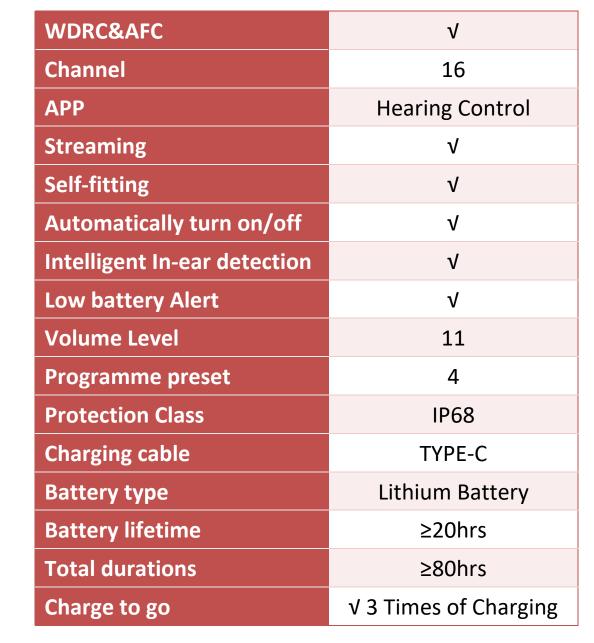

JH-DW5B



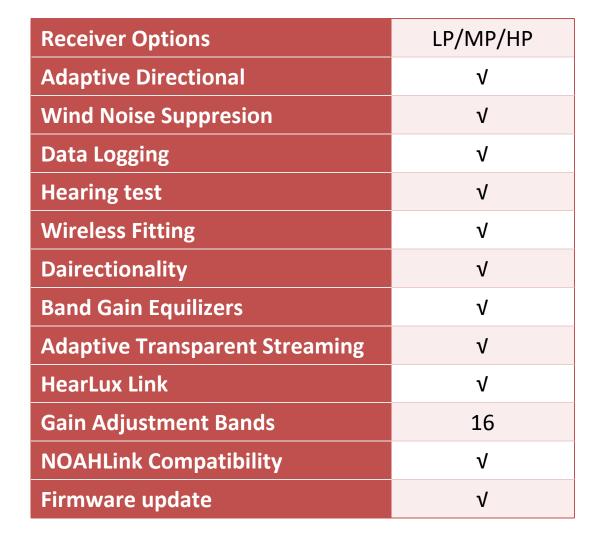









Programmer HLP-10
2.4GHz Wireless Technology
For NOAH Platform
















JH-DW5B





Test Standard		IEC 60118-7:200	IEC 60118-7:2005 2cc coupler		
Test instrument		Fonix 8000	Fonix 8000		
Receiver Options		LP	MP	HP	
OSPL 90(dB)	Max	≤111dB+3	≤115dB+3	≤120dB+3	
	HFA Avg	106±4	112±4	117±4	
FOG 50 (dB)	Max	≤47+3	≤53+3	≤59+3	
	HFA Avg	40±5	48±5	55±5	
Frequency range(Hz)	F1	≤200	≤200	≤200	
	F2	≥7500	≥7500	≥6700	
Total harmonic distortion	500 Hz	≤1.5%+3%	≤1.5%+3%	≤2%+3%	
	800 Hz	≤2%+3%	≤2%+3%	≤2%+3%	
	1600 Hz	≤1.5%+3%	≤2%+3%	≤2%+3%	
EQ Input Noise(dB)		≤20+3	≤20+3	≤20+3	
Battery lifetime(h)		20	20	20	

Fitting Range



LP





MP